

Instructions

Compact Hydraulic Application Pressure Transmitter

PT210CC



Product Introduction

PT210CC Type pressure transmitter is based on the principle of thick film strain measurement, compact all stainless steel welding structure, excellent stability of electronic components, so that it is very strong and reliable, suitable for all industrial applications, especially with high impact, vibration and other hydraulic systems.

Application

1. Hydraulic and pneumatic techniques
2. Pump and compressor
3. machine building

Functional Characteristics

1. 0~10MPa to 0~200MPa measuring range
2. Multiple output signal selection
3. Multiple electrical interface options Multiple international universal process connections

Technical Parameters


Pressure range	0~10MPa to 0~200MPa
Accuracy	±0.5%FS、 ±0.25%FS
Output signal	See the output signal and performance parameter table for details
Power supply	See the output signal and performance parameter table for details
Process connection	See the output signal and performance parameter table for details
Electrical connection	See the electrical connection table for details
Overload pressure	1.5 times the rated pressure
Rupture pressure	Six times the rated pressure
Ambient temperature	-20~85℃

Storage temperature	20~85 °C
Temperature of liquid medium	-20~105 °C
Response time	<2ms
Protection degree	IP65, IP67
Fluid material	304 stainless steel and 17-4 PH stainless steel

Table of output signals and performance parameters

Output signal	Signal features	Power supply	Load resistance (Ω)
4~20mA	two-wire system	9~30Vdc	<(Power supply voltage-9) / 20 mA
0~10Vdc	three-wire system	12~30Vdc	>20k
0.1~10.1Vdc	three-wire system	12~30Vdc	>20k
0.2~10.2Vdc	three-wire system	12~30Vdc	>20k
1~10Vdc	three-wire system	12~30Vdc	>20k
2~10Vdc	three-wire system	12~30Vdc	>20k
0~5Vdc	three-wire system	8~30Vdc	>20k
0.1~5.1Vdc	three-wire system	8~30Vdc	>20k
1~5Vdc	three-wire system	8~30Vdc	>20k
1~6Vdc	three-wire system	8~30Vdc	>20k
0.5~4.5Vdc proportional output	three-wire system	3.3~5Vdc	>20k
0.5~4.5Vdc Absolute output of 5VDC for power supply	three-wire system	5Vdc	>20k
0.5~4.5Vdc Absolute output of the high-voltage powersupply	three-wire system	8~30Vdc	>20k


Appearance size

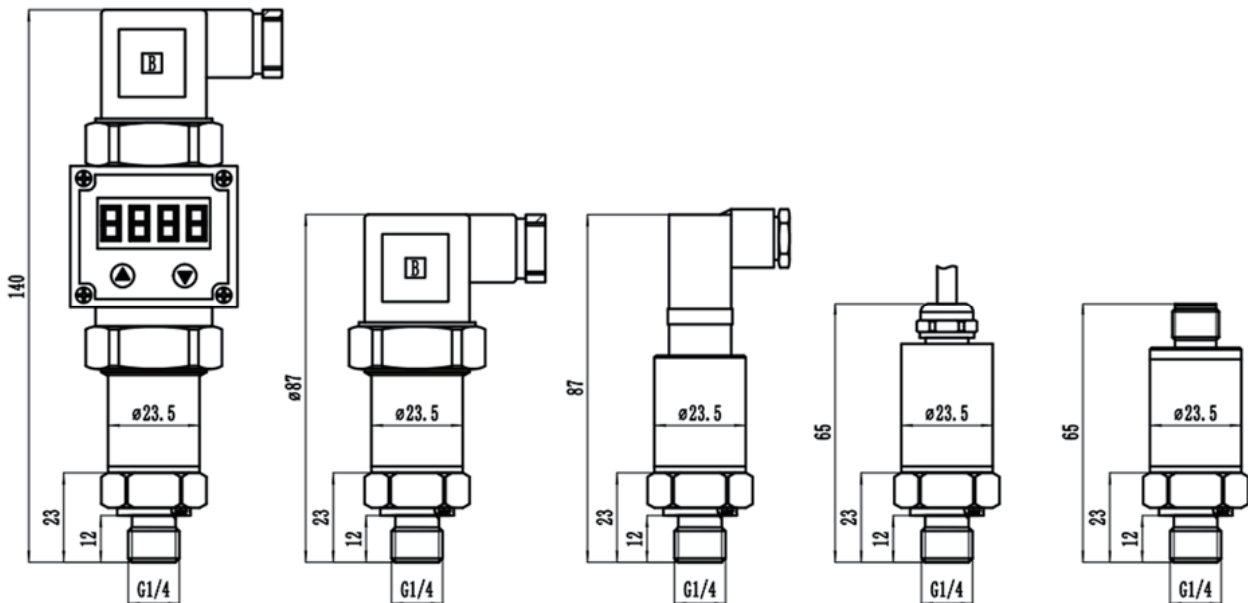

Pulse buffer selection

Gasitation, water hammer, and pressure peaks may occur in product applications, especially in hydraulic systems, e. g. When quickly closing the valve or when the pump is up and down, these phenomena may be on the sensor evil. PT210CC Provide a pressure pulse buffer to eliminate these harmful peaks and protect the sensor. Please note for a pulse buffer.

Process connection of ANSI / ASME B1.20.1/ISO/KS Internal Thread, EN837 Internal Thread, The SAE 04 SA4395-E is unable to select a pulse buffer


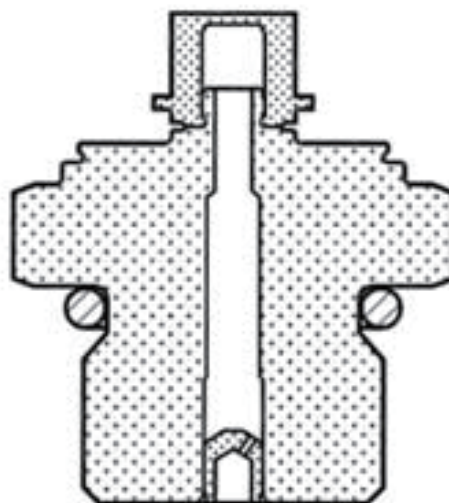


Process connection





DIN EN ISO 11792-2(Formerly DIN3852-E)				EN837、DIN16288			
G	L(mm)	SW(mm)	Selection code	G	L(mm)	SW(mm)	Selection code
G1/4A	14	24	M-G1/4	G1/4B	13	24	N-G1/4
G1/2A	17	27	M-G1/2	G3/8B	16	24	N-G3/8
M14×1.5	14	24	M-M14	G1/2B	20	24	N-G1/2
M20×1.5	17	27	M-M20	M20×1.5	20	24	N-M20
G1/8A	12	24	M-G1/8				

DIN3852-A				EN837内螺纹				
G	L(mm)	SW(mm)	Selection code	G	L(mm)	L1(mm)	SW	Selection code
G1/4A	14	24	O-G1/4	G1/8	7.5	10	24	P-G1/8
G3/8A	14.5	24	O-G3/8	G1/4	10	13	24	P-G1/4
G1/2A	17	27	O-G1/2	G3/8	12	16	24	P-G3/8
				G1/2	15	19	27	P-G1/2

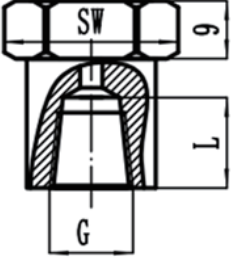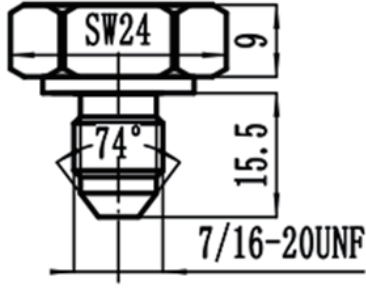SAE J514 E				ANSI/ASME B1.20.1/ISO/KS			
G	L(mm)	SW(mm)	Selection code	G	L(mm)	SW(mm)	Selection code
7/16-20UNF	12	24	Q-7U	1/8NPT	10	24	S-1/8NPT
9/16-20UNF	13	24	Q-9U	1/4NPT	13	24	S-1/4NPT
				1/2NPT	19	24	S-1/2NPT
				R1/4/PT1/4	13	24	S-R1/4
				R3/8/PT3/8	15	24	S-R3/8
				R1/2/PT1/2	19	24	S-R1/2

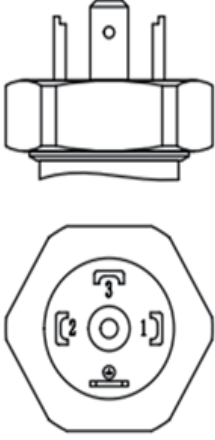



ANSI/ASME B1.20.1/ISO/KS Selection code				SAE 04 SA4395-E (Selection code U-7U)	
					
G	L(mm)	SW(mm)	Selection code		
1/8NPT	11	24	T-1/8NPT		
1/4NPT	14	24	T-1/4NPT		
1/2NPT	20	24	T-1/2NPT		
R1/4/PT1/4	11	24	T-R1/4		
R3/8/PT3/8	16	24	T-R3/8		
R1/2/PT1/2	20	24	T-R1/2		

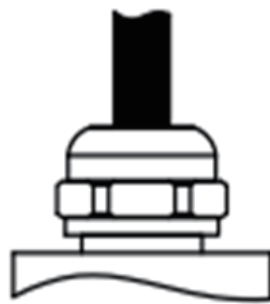Electrical joint

DIN 175301-803 A Hessman connector (IP65 protection class)	DIN 175301 803 C Hessman connector (IP65 protection class)
	
M12x1 (4-pin) Circular Airline Plug (IP67 Protection class)	Waterproof joint outlet (IP67 protection class)
	

Electrical connection

If the product provided has been equipped with cable, please directly according to the color of the cable, please do the correct wiring according to the pin definition

DIN 175301-803 A Hessman connector			
Wiring terminal	Electrical connection	Two-wire system of 4-20 mA / cable color	Three-wire system voltage output / cable color
1		Power supply positive / red	Power supply positive / red
2		Signal positive / black	Power negative/signal negative/ black
3			Signal positive / green
DIN 175301-803 C Hessman connector			
Wiring terminal	Electrical connection	Two-wire system of 4-20 mA / cable color	Three-wire system voltage output / cable color
1		Power supply positive / red	Power supply positive / red
2		Signal positive / black	Power negative/signal negative/ black
3			Signal positive / green
M12x1(4-pin) circular aviation plug			
Wiring terminal	Electrical connection	Two-wire system of 4-20 mA / cable color	Three-wire system voltage output / cable color
1		Power positive / brown	Power positive / brown
2			
3		Signal positive / blue	Signal positive / blue
4			Power negative/signal negative/ black
DIN 175301-803 C Hessman connector			
Wiring terminal	Electrical connection	Two-wire system of 4-20 mA / cable color	Three-wire system voltage output / cable color
Red		Power supply positive	Power supply positive
Black		Signal positive	Power negative/signal negative
Green/Blue			Signal positive

Ordering guide

Series guide	PT210CC	-	X	X	-	X	-	X	-	X	-	X	-	X	-	X
Pressure Unit	bar		B													
	MPa		M													
	psi		P													
Pressure range	Pressure Range Value x			X												
Product connection	See the process connection selection code for details				X											
Output signal	Two-wire system 4~20mA					MA										
	Three-wire system 0~10Vdc					10V										
	Three-wire system 0.1~10.1Vdc					10V1										
	Three-wire system 0.2~10.2Vdc					10V6										
	Three-wire system 1~10Vdc					9V										
	Three-wire system 2~10Vdc					8V										
	Three-wire system 0~5Vdc					5V										
	Three-wire system 0.1~5.1Vdc					5V3										
	Three-wire system 1~5Vdc					4V2										
	Three-wire system 1~6Vdc					5V4										
	Three-line system 0.5~4.5Vdc proportional output					4V3										
	Three-wire system 0.5~4.5Vdc absolute output 5VDC power supply					4V										
	Three-wire system 0.5~ 4.5Vdc absolute output high voltage power supply					4V1										
Electrical connection	DIN 175301-803 A Hessman connector					1D										
	DIN 175301 803 C Hessman connector					2D										
	DIN 175301-803 A Hessman connector with LED display(output signal is only 4-20mA)					3D										
	M12x1(4-pin) circular aviation plug					T										
	Nylon joint outlet line "X" meters					MNx										
	Metal waterproof joint outlet "X" meters					MDx										
Pulse buffer	No pulse buffer is required					--										
	A pulse buffer is required					N										
Accuracy	0.5%FS					--										
	0.25%FS					2A										
Specific requirements	Please consult for other special requirements														...	